

QuantiMass™ PRO Mass Flow Measurement System

FEATURES & ADVANTAGES

- ▼ **Measure flow of quantities** in pneumatic conveying & free-falling processes.
- ▼ **Continuous in-line measuring** without the use of weight scales.
- ▼ **Latest microwave Doppler effect technology** to provide accurate and reproducible flow measurements...typically 1 to 3%.
- ▼ **Compact size** for easy installation into existing processes.
- ▼ **Sturdy, non-intrusive sensor design** minimizes maintenance and wear & tear on instrument.
- ▼ **Fast measuring & adjustable sensitivity** to produce quick, precise data for the specific material being processed at the time.
- ▼ **Output through a DIN-Rail transmitter** to provide communication with an existing control system.
- ▼ **Application versatility...**QuantiMass PRO is suitable for powders, dust, pellets, and granular up to 0.75 inch (2cm).

PRINCIPLE OF OPERATION

The QuantiMass™ PRO Mass Flow Measurement Sensor / Meter is designed with the latest microwave technology and is used to quantify the flow of powders & solids being conveyed in metallic pipes. The QuantiMass PRO is based on technology that has been developed and proven by **mütec** over several years. The measurement process of the sensor is centered on the Doppler effect. The mass flow-rate is determined by evaluating the frequency and amplitude changes during the measurement process. Particles at rest, such as deposits, do not influence the measurement. All powders, dust, pellets and granules can be measured reproducibly, up to the size of 0.75 inch (2cm). The QuantiMass PRO sensor is suitable for in-line measurements in pneumatic or in free-fall pipelines.


A complete QuantiMass PRO system consists of the DIN-Rail transmitter and the mass flow measurement sensor. The DIN-Rail transmitter allows for easy integration into an existing control system. Calibration software is provided. In addition, up to 24 different product parameters can be recorded to accommodate product or process changes.

PRACTICAL APPLICATIONS

- ▼ Monitor for variable flow quantities due to disturbances like different densities.
- ▼ Measure for proper mixing of additives.
- ▼ Non-contact, in-line mass flow measure for most bulk solids and many dusts (Ex. coal dust, saw dust).
- ▼ Suitable for powders, dust, pellets, and granular up to 0.75 inch (2cm).

OPTIONS

- ▼ Choose from standard or high temperature styles.
- ▼ Select from 304 SS or 316 SS sensor housing construction.
- ▼ DIN transmitter style options include:
 - ▼ DIN transmitter with enclosure
 - ▼ DIN transmitter without enclosure

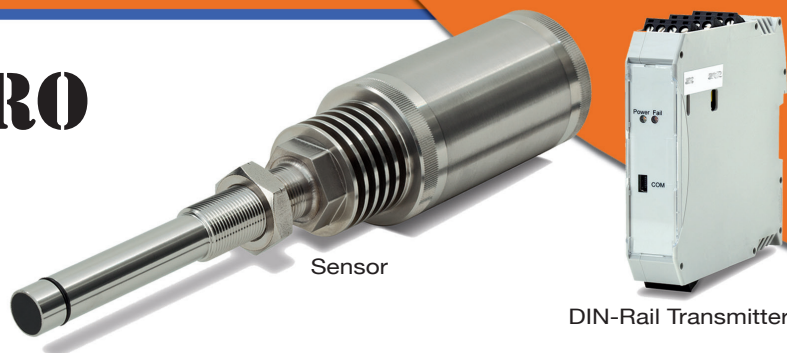

Sensor

DIN-Rail Transmitter

Practical Tip

QuantiMass is ideal for monitoring material flow rates to verify blending mixture ratios.




Scan this with a
smartphone QR-Code app
for more product details.

SPECIFICATIONS

Process Data	
Pipe diameter:	1" to 12" (25mm to 300mm)
Particle size:	.001 micron to 0.75" (1nm to 20mm)
Moisture:	Depending on the product
Pressure:	Up to 6 bar (Option up to 30 bar)
Temperature:	-4 to +194°F (-20 to +90°C) (Higher temperatures on request)
Sensor Data	
Medium touched parts:	304 SS (1.4307) or 316 SS (1.4571) and polyamide 6.6
Housing material:	304 SS (1.4307) or 316 SS (1.4571)
Protection class:	IP 65
Sensor Dimensions:	11.06"L x 2.36"W x 2.36"H (281 x 60 x 60mm)
Accuracy:	1 to 3% typical
Power:	Via transmitter
Interconnection:	4 wires, shielded, RS-485, 3280 ft (1000m) max
Transmitter Data	
Construction:	DIN-Rail, 22.5 mm
Input power:	24 V AC/DC (Power supply ordered separately)
Power consumption:	Max. 2W (+0.3 – 8.5W for thermocouple)
Ambient temperature:	+14 to +140°F (-10 to +60°C)
Protection class:	IP 30
Output signal:	0/4-20 mA (max. 750 Ohm); 0/2-10 Volt
Interfaces:	RS-232, RS-485

MECHANICALS

DIMENSIONS ARE SHOWN IN INCHES WITH MILLIMETER EQUIVALENT IN BRACKETS UNLESS OTHERWISE STATED

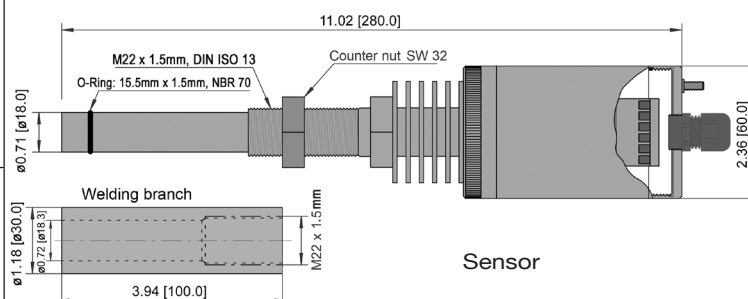

Mass flow measurement of dry sand

ORDERING INFORMATION

QuantiMass™ Pro Mass Flow Measurement System									
Select	Base System								
6	QuantiMass™ Pro Mass Flow Measurement System								
Select	Operating Voltage								
3	24 VAC/DC								
Select	Approvals								
1	Ordinary Location								
2	Hazardous Location, North America (Pending)								
3	Hazardous Location, ATEX for Dust								
Select	Sensor Construction								
1	304 SS & Polyamide 6.6								
2	316 SS & Polyamide 6.6								
Select	Output Configuration								
1	Transmitter, DIN								
2	Transmitter, DIN w Encl.								
Select	Temperature Style								
1	Standard (to 194°F/90°C)								
2	Hi-temp (to 302°F/150°C)								
3	Hi-temp (to 842°F/450°C)								
17	8	6	X	X	-	X	X	X	Order Number

ACCESSORIES:

Part #	Description
17-3401	Welding Branch, Steel
17-3402	Welding Branch, 304 SS
17-3403	Welding Branch, 316 SS
R0514-18001	Cable, 4-Wire, Shielded, 18 AWG ¹
17-8021	Power Supply, Universal AC to 24VDC ¹



Note:

- ¹ Cable or power supply are not included.
Must be ordered separately.

ISO 9001:2008
Certified



Mass flow measurement of calcium carbonate