



Practical solutions... at every level!

Flexar[®] Guided Wave Radar

FEATURES & ADVANTAGES

- ▼ **Real-time continuous output** provides immediate level measurements.
- ▼ **TDR technology (Time Domain Reflectometry)** is unaffected by dust, bulk density and temperature.
- ▼ **Focused / directed energy field** prevents undesired detection of obstructions within the vessel.
- ▼ **No moving parts** to wear which leads to long operational life.
- ▼ **Dual-compartment enclosure** allows separation of access between the wiring and the setup/display areas. Each area has its own access cover.
- ▼ **Measuring range up to 100 feet (30m)** for powder & bulk solids in bins and silos. Can work up to 200 feet (60m) for many liquid applications (Dependent on target material dielectric constant).



Practical Tip

Flexar's capability to penetrate dust clouds makes it suitable for applications using pneumatic conveying such as flour, cement and fly ash.

PRINCIPLE OF OPERATION

Flexar[®] smart guided wave radar sensors operate using TDR (time domain reflectometry) principles. In the application of TDR for process level measurement, radar pulses are focused down to the material surface by the unit's wave guide (a heavy duty cable). The time-of-flight of the pulse and its reflection back to the instrument electronics is directly related to the empty distance in the vessel and the material level. The output from the electronics is continuously updated as the level of the material surface changes.

Flexar[®] units are suited for almost any application, can operate with process temperatures up to 392° F (200°C), can be provided with a variety of process connections and can work reliably with materials having a wide range of bulk densities and dielectric constants. Flexar sensor technology has also been proven in many difficult applications including those where dust levels make it difficult for other technologies to perform reliably, especially at longer ranges.

PRACTICAL APPLICATIONS

- ▼ Use when instantaneous level measurement is required.
- ▼ Ideal for dusty storage conditions.
- ▼ A properly mounted Flexar[®] can prevent reflections of internal structures (For example support beams, let-down ladders, clean-out cages).
- ▼ Perfectly suited for a variety of liquid level measurement applications.
- ▼ Typical applications include, but are not limited to: Grains, Feeds, Flour, Coal Dust, Bulk Chemicals, Carbon Black, Aggregates, Cement, Fly Ash, Lime, Silica, Plastic Pellets, PVC Powders, Liquids and Oils.

OPTIONS

- ▼ Three models to choose from:
 - ▼ Smart RS-485 version for use with **HMI²** or **SiloTrack[™]**.
 - ▼ Analog output version for use as a standalone transmitter.
 - ▼ Smart RS-485 + passive analog 4-20mA.
- ▼ Choice of operating power: universal 100-240 VAC or 24 VAC/DC.
- ▼ Flexible or rigid probe variations.
- ▼ Assortment of process flange connections.
- ▼ Available in ordinary location and CSA_{US/C} hazardous location.
- ▼ Split architecture configuration for high temperature or high vibration locations.
- ▼ Selection of operator interfaces: **HMI²** local operator interface control console or **SiloTrack[™]** inventory management software.
- ▼ Optional independent analog & relay outputs are offered for RS-485 systems using an Auxiliary Output Enclosure (AOE).



Scan this with a smartphone QR-Code app for more product details.



SPECIFICATIONS

More product specifications can be found on Monitor's Web site.

| | | | |
|-----------------------------------|---|---|--|
| Power Requirements: | 100-240VAC (+10%/- 15%); 9VA; 50/60Hz or 24VAC/VDC (+10%/- 15%); 9VA/W | Min. Dielectric Constant [†] : | Direct Mode: Twin cable ≥ 1.8; Single cable/Rod ≥ 2.1 TBF Mode: All probe styles ≥ 1.4 |
| Process Temperature: | -40° F to 300° F (-40° C to 149° C) Ordinary Loc. Units: -20°F to +300°F (-30°C to +150°C); Hazardous Loc. Units: -20°F to +392°F (-30°C to +200°C) | Process Mounting Connection: | Single Cable/Rod Only: 1-1/2" NPT; G 1-1/2 (1-1/2" BSP) All Probe Styles: 2" ANSI 150lb. flange; DN50PN40 flange |
| Ambient Temperature: | -5°F to +120°F (-20°C to +50°C) | Probe Styles: | Single Cable: 316SS; 0.16" (4mm), 0.31" (8mm) Single Rod: 316SS; 0.38" (10mm) diameter Twin Cable: 316SS; Two 0.16" (4mm) cables, FEP spacers |
| Measurement Range ^{††} : | Single Cable 0.16" (4mm): 150ft (45mm) Single Cable 0.31" (8mm): 100ft (30mm) Twin Cable 0.16" (4mm): 200ft (60mm) Single Rod 0.38" (10mm): 10ft (3mm) | Min. Separation From Objects: | Single Cable/Rod: 12" (300mm) Twin Cable: 4" (100mm) |
| Accuracy: | Direct Mode: Solids: ± 0.8" (20mm) Liquids: < 20ft (6m): ± 0.2" (5mm) TBF: ≥ 20ft (6m): ± 0.2" (5mm) + 0.02% of distance measured | Dead Zones: | Single Cable/Rod: Dielectric = 80 (water): Top = 15.75" (400mm); Bottom = 0.8" (20mm) Dielectric = 2.4 (oil): Top = 19.7" (500mm); Bottom = 3.9" (100mm) Twin Cable: Dielectric = 80 (water): Top = 9.8" (250mm); Bottom = 0.8" (20mm) Dielectric = 2.4 (oil): Top = 13.0" (330mm); Bottom = 3.9" (100mm) |
| Repeatability: | ± 0.04" (1mm) | Enclosure Rating: | ENCLOSURE TYPE 4X, IP66 |
| Resolution: | ± 0.012" (0.3mm) | Enclosure Weight: | 18lb (8kg) without probe - ordinary location; 20lb (9kg) without probe - hazardous location |
| Approvals: | Integral Electronics Only: Ordinary Location: CE Mark Hazardous Location: CSA _{US/C} Class I, II & III; Groups B-G | | |

[†] Overall measuring range affects the minimum dielectric constant that can be measured.

^{††} Maximum measuring range is also limited by the dielectric constant of the material being measured.

ORDERING INFORMATION

| Flexar® Guided Wave Radar ¹ | |
|--|--|
| Select | Electronics type |
| 1 | Integral electronics |
| 2 | Remote electronics ⁴ |
| Select | Output |
| 1 | "Smart" RS-485 output ² |
| 2 | 4-20mA analog output |
| 3 | "Smart" RS-485 + passive analog 4-20mA ⁷ |
| Select | Probe Type ⁶ |
| 1 | Single Cable, SS, 0.16" (4mm) Diameter |
| 2 | Single Cable, SS, 0.31" (8mm) Diameter |
| 3 | Twin Cable, SS, 0.16" (4mm) Diameter |
| 4 | Single Rod, SS, 0.38" (10mm) Diameter |
| Select | Approvals |
| 1 | Ordinary location |
| 2 | Hazardous location CSA US/C (North America) ⁴ |
| Select | Operating Voltage |
| 1 | Universal high voltage (100-240VAC) |
| 2 | Low voltage (24VAC/VDC) |
| Select | Probe Connection |
| 1 | 1-1/2" NPT Threaded, SS ³ |
| 2 | G 1-1/2 (1-1/2" BSP) Threaded, SS ³ |
| 3 | 2" ANSI 150lb SS Flange, SS |
| 4 | DN50PN40 DIN Flange, SS |
| Select | Counterweights |
| 1 | For 0.16" (4mm) single cable |
| 2 | For 0.31" (8mm) single cable, large CW |
| 3 | For 0.31" (8mm) single cable, small CW |
| 4 | For 0.16" (4mm) twin cable |
| 5 | None required (rods only) |
| 16 - 8 | X X X - X X X X Order Number |

ACCESSORIES¹:

| Part # | Description |
|--------------------------|--|
| 16-3060 | Flange, 2" ANSI 150 LB, 1-1/2 NPT ⁵ , Carbon Steel, Powder |
| 16-3062 | Flange, DN50 PN40, 1-1/2 NPT ⁵ , Carbon Steel, Powder |
| 16-3064 | Flange, 4" ANSI 150 LB, 1- 1/2 NPT ⁵ , Carbon Steel, Powder |
| 16-3066 | Flange, DN100 PN40, 1-1/2 NPT ⁵ , Carbon Steel, Powder |
| 16-3070 | Flange, K-style, Flat, 1 1/2 NPT ⁵ , Aluminum |
| 16-3072 | Flange, K-style, 10 Deg, 1 1/2 NPT ⁵ , Aluminum |
| R0514-22001 ⁸ | Belden® 9322 RS-485 Communication Cable (Overall Beldfoil® Shield - 100% Coverage, PVC Insulation, Chrome PVC Jacket, Nominal OD is .201" [5.10mm]) |



NOTES: 1 Consult Monitor Technologies factory for all applications prior to pricing and issuing quotation.

2 For use with SiloTrack V3.5 and higher

3 Single Cable/Rod probes only

4 Hazardous Location approval of Remote Electronics version is not available.

5 Flange accessories include a 1-1/2" NPT center hole for attaching to Flexar® units with 1-1/2" NPT threaded process connection.


6 Customer specified probe length is from the bottom of the process connection to the bottom of the counterweight (end of rod on single rod probe).

7 Requires transmitter power supply on receiving end of Passive 4-20mA output.

8 R0514-22001 cable is not for plenum installations. Consult local electrical codes and verify compliance before installing.

MECHANICALS

DIMENSIONS ARE SHOWN IN INCHES WITH MILLIMETER EQUIVALENT IN BRACKETS

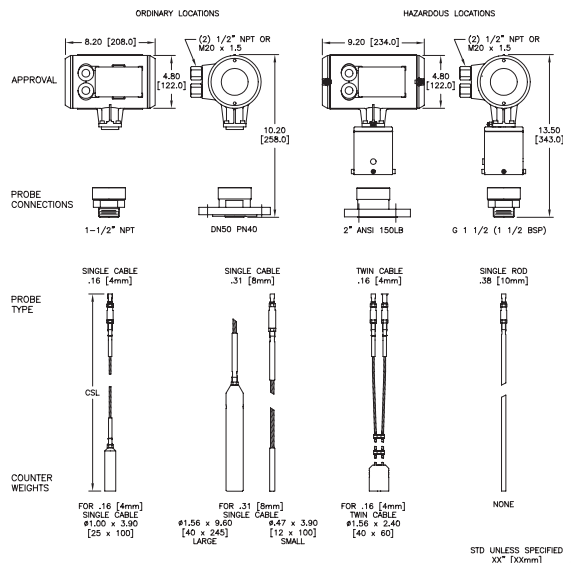

Information on this sheet is subject to change without notice.

ISO 9001:2008
Certified